


“Blue Steel” CXTS3000 Enterprise-Grade CompletePBX TwinStar Plus Telephony System Data Sheet

Overview

The TwinStar Plus Blue Steel CXTS3000 configuration is a bundled product comprised of two Xorcom Blue Steel CXT3000 IP-PBX servers that have been optimized for use as a failover system. Both servers are connected via Ethernet (and optionally, via USB 2.0 to an Astribank).

The TwinStar Plus Blue Steel CXTS3000 provides full redundancy for a complete PBX system, including telephony interfaces (if required). It can also be used in a pure SIP environment. A sophisticated automatic replication and detection mechanism detects server failure and switches all telephony to the backup server, keeping downtime to an absolute minimum.

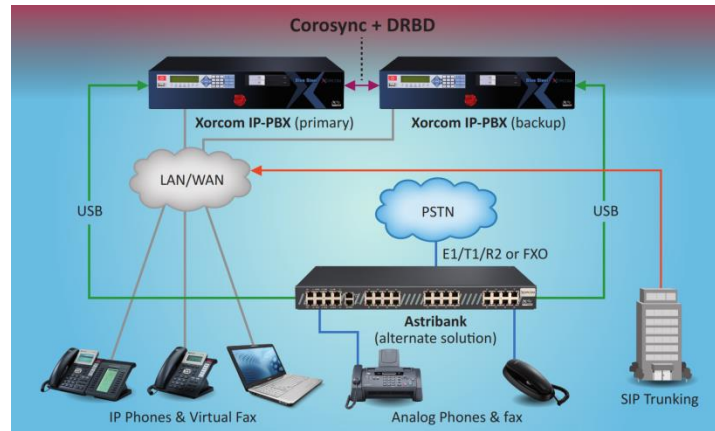

Blue Steel CXTS3000 – TwinStar Plus configuration featuring dual Blue Steel CXT3000 servers with optional Astribank included.

Technical Specification (each server)

Features

- Unlimited voicemail boxes, hunt groups, call center groups, and auto attendants (IVRs)
- Basic built-in call center with call recording, barge and whisper
- Hot-desking
- Sophisticated Classes of Service for enhanced security
- Emergency notification module
- Endpoint manager
- User-friendly Web interface
- Interface in different languages
- CDR (Call Details Record)
- TDM/SIP/IAX trunks
- Remote extensions
- Voicemail
- Voicemail to email
- Web access to voicemail
- Fax support
- Fax to email
- IVR menu system
- Ring groups
- Call queues
- Conference rooms
- Follow me
- Time-based routing
- Advanced dialing rules
- Music-on-hold
- Paging and intercom
- Admin status screen

- Package manager (for easy updates)

Network settings tool


Software

| | |
|----------------------|--|
| Management Interface | Xorcom CompletePBX 5 (64-bit) |
| Linux version | CentOS 7 |
| Framework | Asterisk 13 |
| Security | Intrusion protection software, firewall protection, password strength indicator, class-of-service, dialing rules, modern Linux tools |

Hardware

| | |
|-----------------------|--|
| Processor | Intel i3 2120 (3.3GHz, 2 Cores, 3MB cache) |
| RAM | 4GB |
| Hard disk | Two hot swappable 320GB 2.5" (optional upgrade to 500GB) |
| RAID1 | Dual hard drive for increased system reliability |
| Fan | 3 redundant fans |
| USB | 2 external USB 2.0 |

Power

| | |
|-------------------------------|---|
| Power supply | Two internal, redundant, hot-swappable units |
| Voltage | Switching, auto adjust 100/240 Volts, 50/60 Hz |
| Power consumption | 230 Watts (maximum) |
| Built in grounding connection |  |

Network

| | |
|--------------------------|---|
| Ethernet port - standard | 10/100/1000 Mb/s (x2). Note: One of these ports is required for connecting the two TwinStar Plus servers to each other. |
|--------------------------|---|

Maintenance and Support

- LCD (Liquid Crystal Display) touch panel, supporting:
 - ◆ Status of active systems, including:
 - All configured IP addresses
 - TwinStar Plus™ (dual-server redundancy)
 - Redundant Power Supply (when configured)
 - Blink ports (extensions, channels, XPD and SPAN)

- Active calls
- ◆ Maintenance issues, including:
 - Asterisk restart
 - DAHDI restart
 - Server reboot
 - Server power off
- ◆ Settings, including:
 - Enable/disable DHCP
 - Manual IP configuration
- Monitor and keyboard support
- Internal backup & restore utility
- External [Rapid Recovery™](#) backup utility (provided on disk-on-key)
- [Rapid Tunneling™](#) utility providing secure remote access for product support purposes
- Internet updates

Environment

| | |
|----------------------------|----------------------------------|
| Storage temperature | -20° to 70° Celsius (-4°-158° F) |
| Working temperature | 0° to 40° Celsius (32°-104° F) |
| Humidity | 20%-95%, non-condensing |

Dimensions and Weight [each server]

| | |
|-------------------|---|
| Weight | 7 Kg, 15.4 lbs |
| Size | 19" 2U industry standard rack-mountable chassis |
| Dimensions | 44 x 44 x 9 cm (17.3 x 17.3 x 3.5") |

Specifications may change without prior notice.